TECHNICAL SPECIFICATIONS

DEFENSIVE BARRIERS

MIL™ 1 UNIT

UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL1 (Beige)	4'6" (1.37m)	3'6" (1.06m)	32'9" (10m)	5680-99-835-7866
MIL1 (Green)	4'6" (1.37m)	3'6" (1.06m)	32'9" (10m)	5680-99-001-9396

A geotextile-lined unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

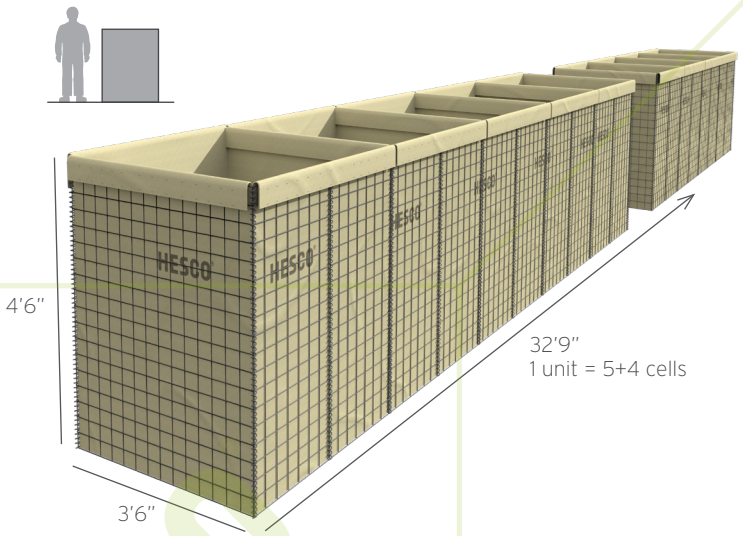

GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

PACKAGING AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS

HEIGHT	WIDTH	LENGTH	WEIGHT
10" (0.25m)	3'10" (1.17m)	4'6" (1.37m)	333 lb (151kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
7 units	7'3" (2.20m)	3'11" (1.20m)	4'9" (1.45m)	2,381 lb (1,080kg)

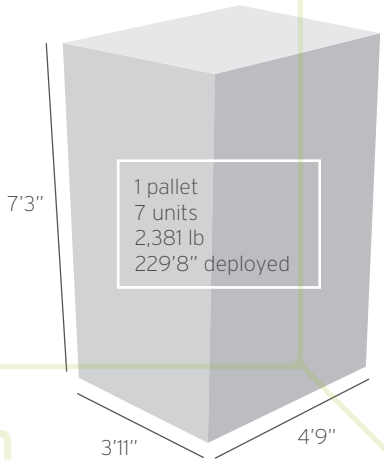

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	18	126	4,133' (1,260m)
20' Container	8	56	1,837' (560m)
40' Container	16	112	3,674' (1,120m)

Hesco Group
4100 Park Approach
Thorpe Park, Leeds
LS15 8GB
United Kingdom

Telephone: +44 113 248 6633
Email: support@hesco.com

Disclaimer: The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

Proud to be a PRÆSIDIAD brand, Hesco is part of a global network, working alongside Betafence and Guardiar as leaders in perimeter security systems and solutions. For more information please visit praesidiad.com.

Patents and Trademarks: HESCO® products are subject to patents and/or patent applications in territories around the world. HESCO® is a registered trademark of Hesco Bastion Ltd and its affiliates ("Hesco") around the world. Other trademarks also apply. For full details visit: hesco.com/legal_notice

Quality Standards: Hesco operates a quality management system certified to ISO9001. Approved Certificate number: 10147344

This material is subject to copyright protection. Copyright © 2022 Hesco. All rights reserved.

PT007 211027

TECHNICAL SPECIFICATIONS

DEFENSIVE BARRIERS

MIL™ 2 UNIT

UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL2 (Beige)	2′ (0.61m)	2′ (0.61m)	4′ (1.22m)	5680-99-968-1764
MIL2 (Green)	2′ (0.61m)	2′ (0.61m)	4′ (1.22m)	5680-99-001-9397

A geotextile-lined unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

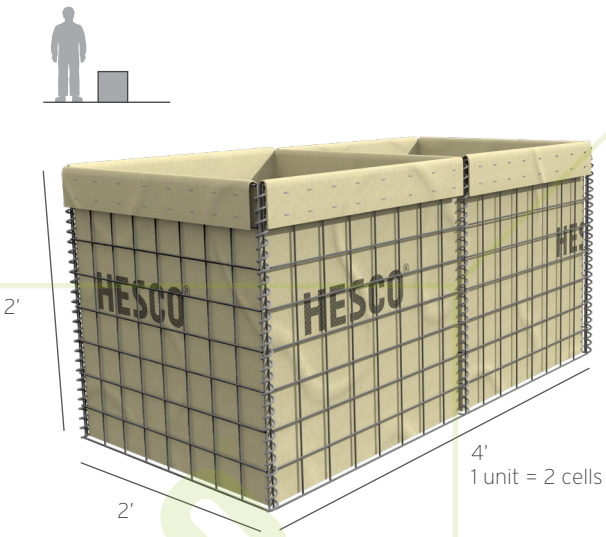

PACKAGING AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS

HEIGHT	WIDTH	LENGTH	WEIGHT
2″ (0.05m)	2′3″ (0.68m)	2′ (0.61m)	22 lb (10kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
120 units	3′1″ (0.95m)	6′7″ (2.00m)	6′11″ (2.10m)	2,804 lb (1,272kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	18	2,160	8,645′ (2,635m)
20′ Container	6	720	2,881′ (878m)
40′ Container	12	1,440	5,763′ (1,756m)

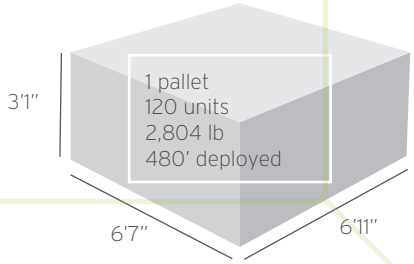

Hesco Group
4100 Park Approach
Thorpe Park, Leeds
LS15 8GB
United Kingdom

Telephone: +44 113 248 6633
Email: support@hesco.com

Disclaimer: The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

Proud to be a PRÆSIDIAD brand, Hesco is part of a global network, working alongside Betafence and Guardiar as leaders in perimeter security systems and solutions. For more information please visit praesidiad.com.

Patents and Trademarks: HESCO® products are subject to patents and/or patent applications in territories around the world. HESCO® is a registered trademark of Hesco Bastion Ltd and its affiliates ("Hesco") around the world. Other trademarks also apply. For full details visit: hesco.com/legal_notice

Quality Standards: Hesco operates a quality management system certified to ISO9001. Approved Certificate number: 10147344

This material is subject to copyright protection. Copyright © 2022 Hesco. All rights reserved.

PT007 211027

TECHNICAL SPECIFICATIONS

DEFENSIVE BARRIERS

MIL™ 3 UNIT

UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL3 (Beige)	3'3" (1.00m)	3'3" (1.00m)	32'9" (10m)	5680-99-001-9392
MIL3 (Green)	3'3" (1.00m)	3'3" (1.00m)	32'9" (10m)	5680-99-001-9398

A geotextile-lined unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

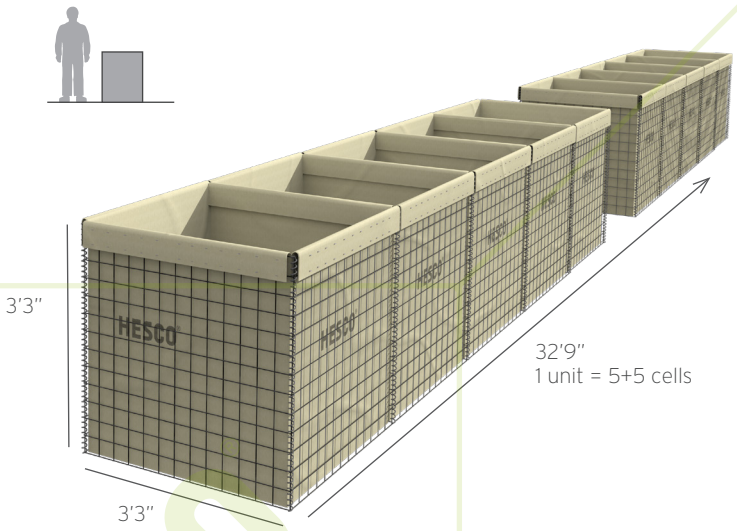

PACKAGING AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS

HEIGHT	WIDTH	LENGTH	WEIGHT
9" (0.23m)	3'9" (1.14m)	3'3" (1.00m)	240 lb (109kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
8 units	5'10" (1.78m)	3'7" (1.10m)	3'11" (1.20m)	1,956 lb (887kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	22	176	5,774' (1,760m)
20' Container	10	80	2,624' (800m)
40' Container	20	160	5,249' (1,600m)

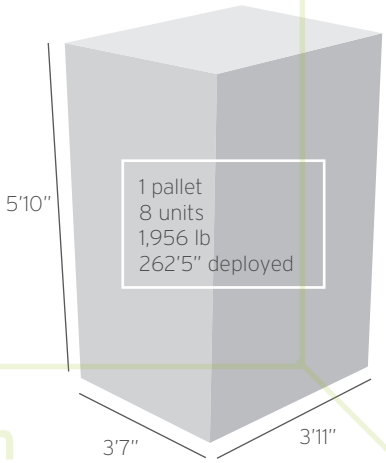

Hesco Group
4100 Park Approach
Thorpe Park, Leeds
LS15 8GB
United Kingdom

Telephone: +44 113 248 6633
Email: support@hesco.com

Disclaimer: The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

Proud to be a PRÆSIDIAD brand, Hesco is part of a global network, working alongside Betafence and Guardiar as leaders in perimeter security systems and solutions. For more information please visit praesidiad.com.

Patents and Trademarks: HESCO® products are subject to patents and/or patent applications in territories around the world. HESCO® is a registered trademark of Hesco Bastion Ltd and its affiliates ("Hesco") around the world. Other trademarks also apply. For full details visit: hesco.com/legal_notice

Quality Standards: Hesco operates a quality management system certified to ISO9001. Approved Certificate number: 10147344

This material is subject to copyright protection. Copyright © 2022 Hesco. All rights reserved.

TECHNICAL SPECIFICATIONS

DEFENSIVE BARRIERS

MIL™ 4 UNIT

UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL4 (Beige)	3'3" (1.00m)	5' (1.52m)	32'9" (10m)	5680-99-001-9393
MIL4 (Green)	3'3" (1.00m)	5' (1.52m)	32'9" (10m)	5680-99-001-9399

A geotextile-lined unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

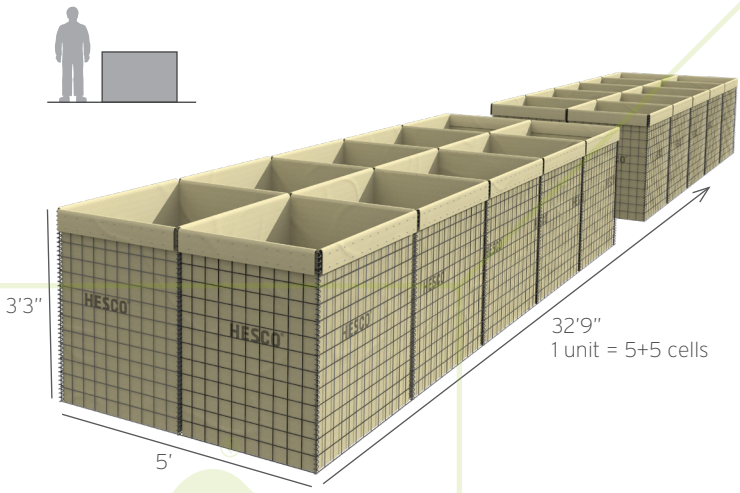

PACKAGING AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS

HEIGHT	WIDTH	LENGTH	WEIGHT
1'4" (0.40m)	5'3" (1.60m)	3'3" (1.00m)	370 lb (168kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
8 units	6'1" (1.85m)	3'7" (1.10m)	8'9" (2.67m)	3,020 lb (1,370kg)

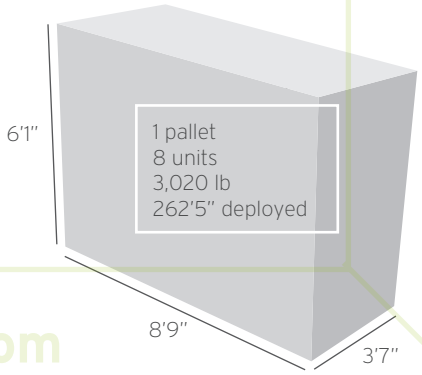

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	10	80	2,624' (800m)
20' Container	4	32	1,050' (320m)
40' Container	8	64	2,100' (640m)

Hesco Group
4100 Park Approach
Thorpe Park, Leeds
LS15 8GB
United Kingdom

Telephone: +44 113 248 6633
Email: support@hesco.com

Disclaimer: The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

Proud to be a PRÆSIDIAD brand, Hesco is part of a global network, working alongside Betafence and Guardiar as leaders in perimeter security systems and solutions. For more information please visit praesidiad.com.

Patents and Trademarks: HESCO® products are subject to patents and/or patent applications in territories around the world. HESCO® is a registered trademark of Hesco Bastion Ltd and its affiliates ("Hesco") around the world. Other trademarks also apply. For full details visit: hesco.com/legal_notice

Quality Standards: Hesco operates a quality management system certified to ISO9001. Approved Certificate number: 10147344

This material is subject to copyright protection. Copyright © 2022 Hesco. All rights reserved.

PT007 211027

TECHNICAL SPECIFICATIONS

DEFENSIVE BARRIERS

MIL™ 5 UNIT

UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL5 (Beige)	2' (0.61m)	2' (0.61m)	10' (3.05m)	5680-99-001-9394
MIL5 (Green)	2' (0.61m)	2' (0.61m)	10' (3.05m)	5680-99-001-9400

A geotextile-lined unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

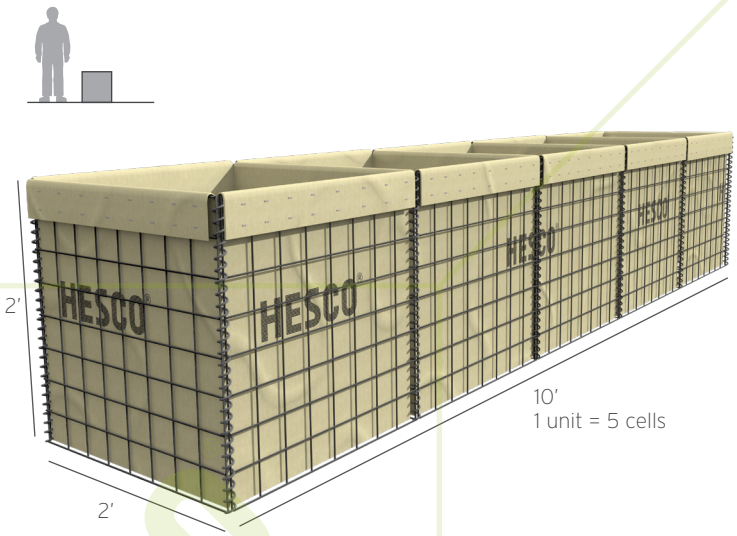

PACKAGING AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS

HEIGHT	WIDTH	LENGTH	WEIGHT
5" (0.13m)	2'7" (0.79m)	2' (0.61m)	51 lb (23kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
50 units	2'10" (0.87m)	6'5" (1.95m)	6'11" (2.10m)	2,626 lb (1,191kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	18	900	9,006' (2,745m)
20' Container	6	300	3,000' (915m)
40' Container	12	600	6,003' (1,803m)

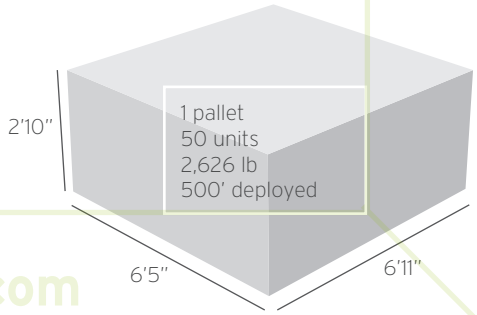

© HESCO
hesco.com

Hesco Group
4100 Park Approach
Thorpe Park, Leeds
LS15 8GB
United Kingdom

Telephone: +44 113 248 6633
Email: support@hesco.com

Disclaimer: The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

Proud to be a PRÆSIDIAD brand, Hesco is part of a global network, working alongside Betafence and Guardiar as leaders in perimeter security systems and solutions. For more information please visit praesidiad.com.

Patents and Trademarks: HESCO® products are subject to patents and/or patent applications in territories around the world. HESCO® is a registered trademark of Hesco Bastion Ltd and its affiliates ("Hesco") around the world. Other trademarks also apply. For full details visit: hesco.com/legal_notice

Quality Standards: Hesco operates a quality management system certified to ISO9001. Approved Certificate number: 10147344

This material is subject to copyright protection. Copyright © 2022 Hesco. All rights reserved.

PT007 211027

TECHNICAL SPECIFICATIONS

DEFENSIVE BARRIERS

MIL™ 7 UNIT

UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL7 (Beige)	7'3" (2.21m)	7' (2.13m)	91' (27.74m)	5680-99-169-0183
MIL7 (Green)	7'3" (2.21m)	7' (2.13m)	91' (27.74m)	5680-99-126-3716

A geotextile-lined unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

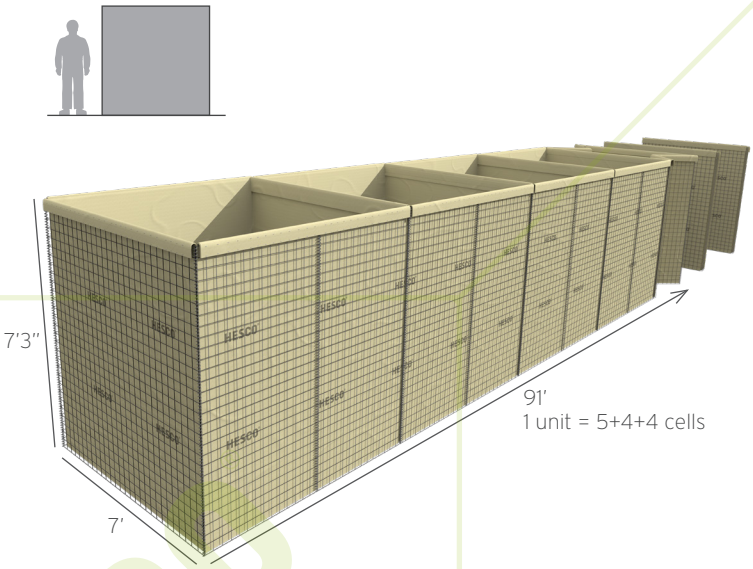

PACKAGING AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS

HEIGHT	WIDTH	LENGTH	WEIGHT
1'7" (0.48m)	7'4" (2.24m)	7'3" (2.21m)	2,105 lb (955kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
1 unit	1'11" (0.60m)	7'2" (2.20m)	7'6" (2.30m)	2,277 lb (1,033kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	20	20	1,820' (555m)
20' Container	6	6	546' (166m)
40' Container	15	15	1,365' (416m)
40' HC Container	20	20	1,820' (555m)

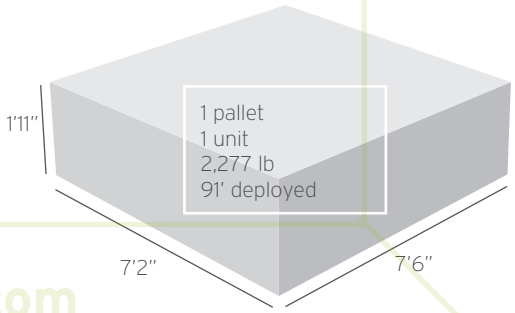

Hesco Group
4100 Park Approach
Thorpe Park, Leeds
LS15 8GB
United Kingdom

Telephone: +44 113 248 6633
Email: support@hesco.com

Disclaimer: The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

Proud to be a PRÆSIDIAD brand, Hesco is part of a global network, working alongside Betafence and Guardiar as leaders in perimeter security systems and solutions. For more information please visit praesidiad.com.

Patents and Trademarks: HESCO® products are subject to patents and/or patent applications in territories around the world. HESCO® is a registered trademark of Hesco Bastion Ltd and its affiliates ("Hesco") around the world. Other trademarks also apply. For full details visit: hesco.com/legal_notice

Quality Standards: Hesco operates a quality management system certified to ISO9001. Approved Certificate number: 10147344

This material is subject to copyright protection. Copyright © 2022 Hesco. All rights reserved.

TECHNICAL SPECIFICATIONS

DEFENSIVE BARRIERS

MIL™ 8 UNIT

UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL8 (Beige)	4'6" (1.37m)	4' (1.22m)	32'9" (10m)	5680-99-335-4902
MIL8 (Green)	4'6" (1.37m)	4' (1.22m)	32'9" (10m)	5680-99-517-3281

A geotextile-lined unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

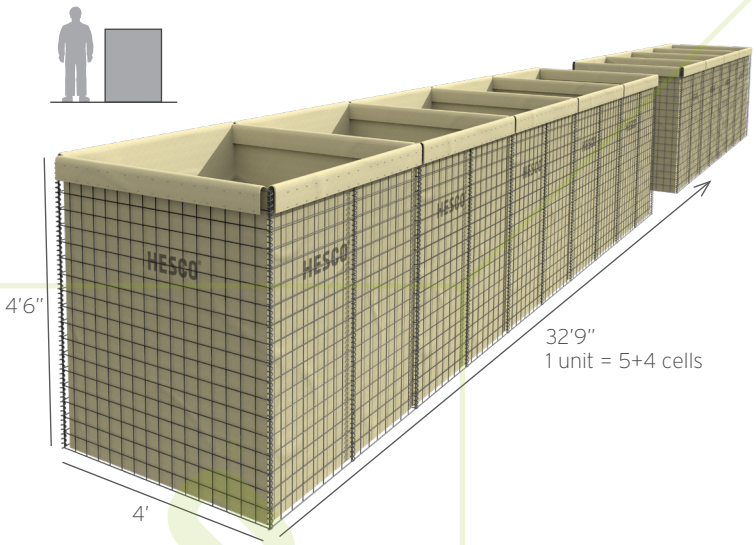

PACKAGING AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS

HEIGHT	WIDTH	LENGTH	WEIGHT
11" (0.28m)	4'3" (1.29m)	4'6" (1.37m)	337 lb (153kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
4 units	5'1" (1.55m)	3'10" (1.17m)	4'6" (1.37m)	1,419 lb (644kg)

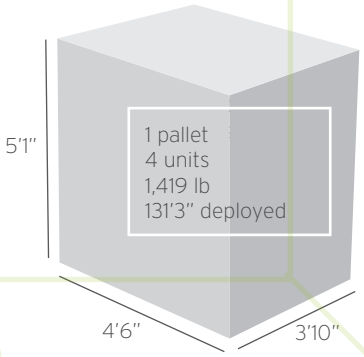

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	18	72	2,362' (720m)
20' Container	8	32	1,050' (320m)
40' Container	18	72	2,362' (720m)

Hesco Group
4100 Park Approach
Thorpe Park, Leeds
LS15 8GB
United Kingdom

Telephone: +44 113 248 6633
Email: support@hesco.com

Disclaimer: The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

Proud to be a PRÆSIDIAD brand, Hesco is part of a global network, working alongside Betafence and Guardiar as leaders in perimeter security systems and solutions. For more information please visit praesidiad.com.

Patents and Trademarks: HESCO® products are subject to patents and/or patent applications in territories around the world. HESCO® is a registered trademark of Hesco Bastion Ltd and its affiliates ("Hesco") around the world. Other trademarks also apply. For full details visit: hesco.com/legal_notice

Quality Standards: Hesco operates a quality management system certified to ISO9001. Approved Certificate number: 10147344

This material is subject to copyright protection. Copyright © 2022 Hesco. All rights reserved.

PT007 211027

TECHNICAL SPECIFICATIONS

DEFENSIVE BARRIERS

MIL™ 9 UNIT

UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL9 (Beige)	3'3" (1.00m)	2'6" (0.76m)	30' (9.14m)	5680-99-563-5949
MIL9 (Green)	3'3" (1.00m)	2'6" (0.76m)	30' (9.14m)	5680-99-052-0506

A geotextile-lined unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

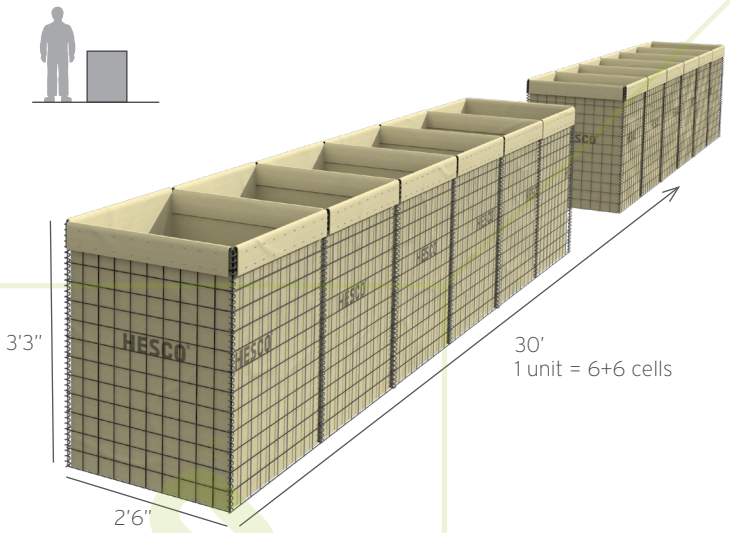

PACKAGING AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS

HEIGHT	WIDTH	LENGTH	WEIGHT
1'1" (0.33m)	3' (0.91m)	3'3" (1.00m)	222 lb (101kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
7 units	6' (1.83m)	3'7" (1.09m)	3'3" (1.00m)	1,607 lb (729kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	24	168	5,037' (1,535m)
20' Container	10	70	2,100' (640m)
40' Container	20	140	4,198' (1,280m)

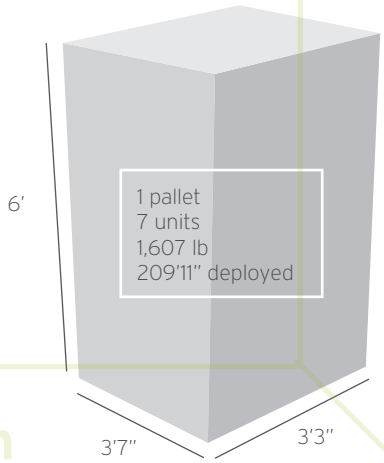

Hesco Group
4100 Park Approach
Thorpe Park, Leeds
LS15 8GB
United Kingdom

Telephone: +44 113 248 6633
Email: support@hesco.com

Disclaimer: The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

Proud to be a PRÆSIDIAD brand, Hesco is part of a global network, working alongside Betafence and Guardiar as leaders in perimeter security systems and solutions. For more information please visit praesidiad.com.

Patents and Trademarks: HESCO® products are subject to patents and/or patent applications in territories around the world. HESCO® is a registered trademark of Hesco Bastion Ltd and its affiliates ("Hesco") around the world. Other trademarks also apply. For full details visit: hesco.com/legal_notice

Quality Standards: Hesco operates a quality management system certified to ISO9001. Approved Certificate number: 10147344

This material is subject to copyright protection. Copyright © 2022 Hesco. All rights reserved.

PT007 211027

TECHNICAL SPECIFICATIONS

DEFENSIVE BARRIERS

MIL™ 10 UNIT

UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL10 (Beige)	7'3" (2.21m)	5' (1.52m)	100' (30.5m)	5680-99-391-0852
MIL10 (Green)	7'3" (2.21m)	5' (1.52m)	100' (30.5m)	5680-99-770-0326

A geotextile-lined unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

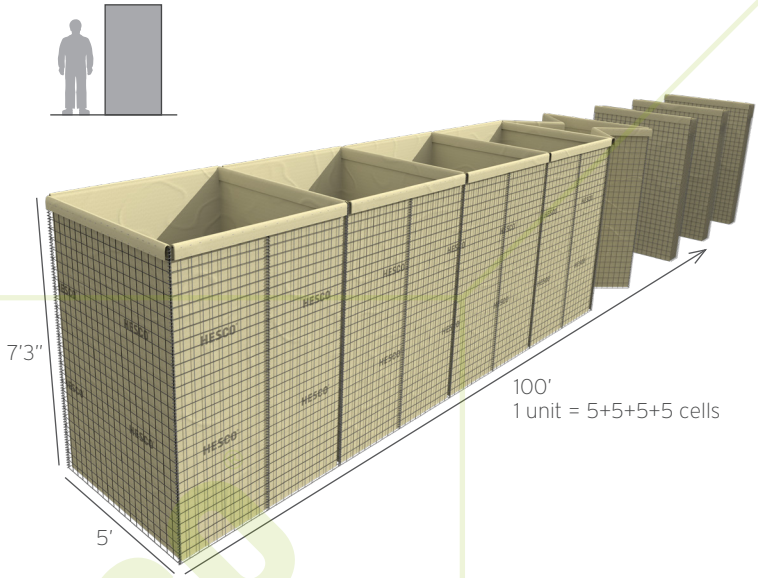

PACKAGING AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS

HEIGHT	WIDTH	LENGTH	WEIGHT
2'4" (0.71m)	5'5" (1.65m)	7'4" (2.24m)	2,372 lb (1,076kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
1 unit	2'10" (0.87m)	5'4" (1.62m)	7'6" (2.30m)	2,496 lb (1,132kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	20	20	2,000' (610m)
20' Container	6	6	600' (183m)
40' Container	14	14	1,400' (427m)

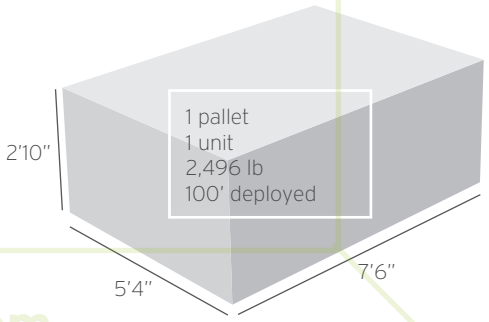

© Hesco
hesco.com

Hesco Group
4100 Park Approach
Thorpe Park, Leeds
LS15 8GB
United Kingdom

Telephone: +44 113 248 6633
Email: support@hesco.com

Disclaimer: The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

Proud to be a PRÆSIDIAD brand, Hesco is part of a global network, working alongside Betafence and Guardiar as leaders in perimeter security systems and solutions. For more information please visit praesidiad.com.

Patents and Trademarks: HESCO® products are subject to patents and/or patent applications in territories around the world. HESCO® is a registered trademark of Hesco Bastion Ltd and its affiliates ("Hesco") around the world. Other trademarks also apply. For full details visit: hesco.com/legal_notice

Quality Standards: Hesco operates a quality management system certified to ISO9001. Approved Certificate number: 10147344

This material is subject to copyright protection. Copyright © 2022 Hesco. All rights reserved.

PT007 211027

TECHNICAL SPECIFICATIONS

DEFENSIVE BARRIERS

MIL™ 11 UNIT

UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL11 (Beige)	4' (1.22m)	12" (0.30m)	4' (1.22m)	7195-99-867-9131
MIL11 (Green)	4' (1.22m)	12" (0.30m)	4' (1.22m)	7195-99-668-0875

A geotextile-lined unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.



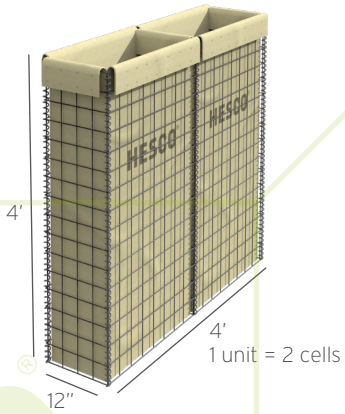

PACKAGING AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS

HEIGHT	WIDTH	LENGTH	WEIGHT
3" (0.08m)	2'11" (0.89m)	4' (1.22m)	35 lb (16kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
33 units	4'3" (1.3m)	3'7" (1.1m)	3'11" (1.2m)	1,332 lb (600kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	18	1080	4,322' (1,318m)
20' Container	8	480	1,921' (586m)
40' Container	16	960	3,842' (1,171m)

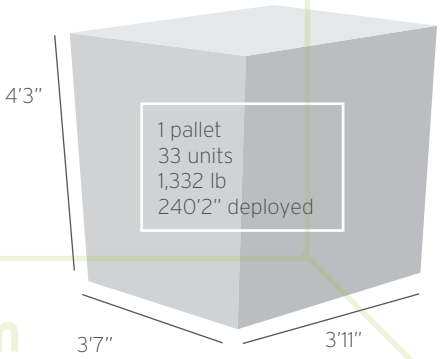

Hesco Group
4100 Park Approach
Thorpe Park, Leeds
LS15 8GB
United Kingdom

Telephone: +44 113 248 6633
Email: support@hesco.com

Disclaimer: The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

Proud to be a PRÆSIDIAD brand, Hesco is part of a global network, working alongside Betafence and Guardiar as leaders in perimeter security systems and solutions. For more information please visit praesidiad.com.

Patents and Trademarks: HESCO® products are subject to patents and/or patent applications in territories around the world. HESCO® is a registered trademark of Hesco Bastion Ltd and its affiliates ("Hesco") around the world. Other trademarks also apply. For full details visit: hesco.com/legal_notice

Quality Standards: Hesco operates a quality management system certified to ISO9001. Approved Certificate number: 10147344

This material is subject to copyright protection. Copyright © 2022 Hesco. All rights reserved.

PT007 211027

TECHNICAL SPECIFICATIONS

DEFENSIVE BARRIERS

MIL™ 12 UNIT

UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL12 (Beige)	7' (2.13m)	3'6" (1.06m)	108' (33m)	5680-99-974-8891
MIL12 (Green)	7' (2.13m)	3'6" (1.06m)	108' (33m)	5680-99-153-1977

A geotextile-lined unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

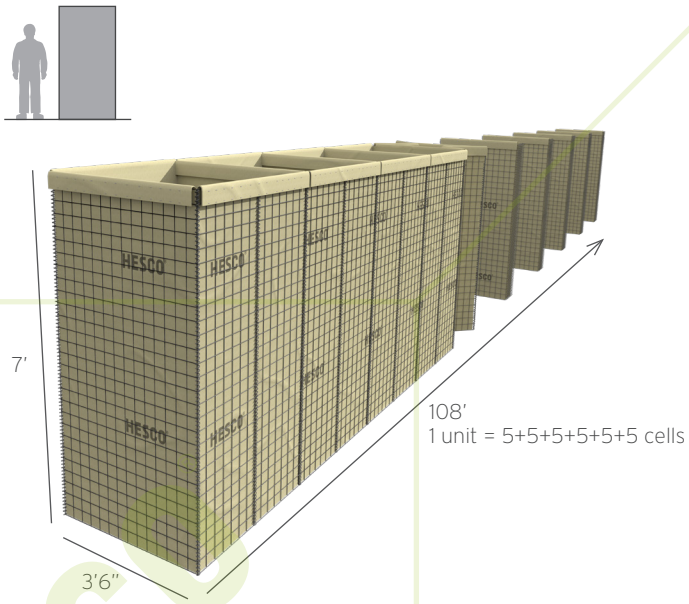

PACKAGING AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS

HEIGHT	WIDTH	LENGTH	WEIGHT
2'1" (0.64m)	7'8" (2.34m)	7'7" (2.32m)	1,715 lb (778kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
1 unit	2'8" (0.80m)	7'8" (2.34m)	7'7" (2.32m)	1,887 lb (856kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	18	18	1,948' (594m)
20' Container	6	6	650' (198m)
40' Container	15	15	1,624' (495m)

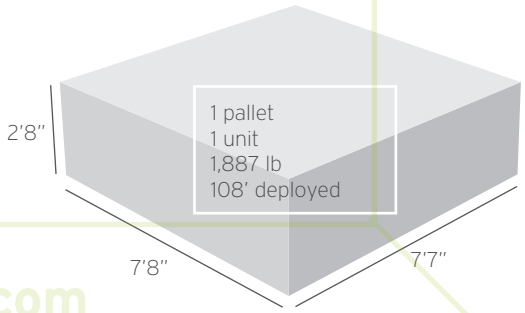

Hesco Group
4100 Park Approach
Thorpe Park, Leeds
LS15 8GB
United Kingdom

Telephone: +44 113 248 6633
Email: support@hesco.com

Disclaimer: The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

Proud to be a PRÆSIDIAD brand, Hesco is part of a global network, working alongside Betafence and Guardiar as leaders in perimeter security systems and solutions. For more information please visit praesidiad.com.

Patents and Trademarks: HESCO® products are subject to patents and/or patent applications in territories around the world. HESCO® is a registered trademark of Hesco Bastion Ltd and its affiliates ("Hesco") around the world. Other trademarks also apply. For full details visit: hesco.com/legal_notice

Quality Standards: Hesco operates a quality management system certified to ISO9001. Approved Certificate number: 10147344

This material is subject to copyright protection. Copyright © 2022 Hesco. All rights reserved.

PT007 211027

TECHNICAL SPECIFICATIONS

DEFENSIVE BARRIERS

MIL™ 19 UNIT

UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL19 (Beige)	9' (2.74m)	3'6" (1.06m)	10'5" (3.18m)	5670-99-152-1284
MIL19 (Green)	9' (2.74m)	3'6" (1.06m)	10'5" (3.18m)	5670-99-242-9574

A geotextile-lined unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

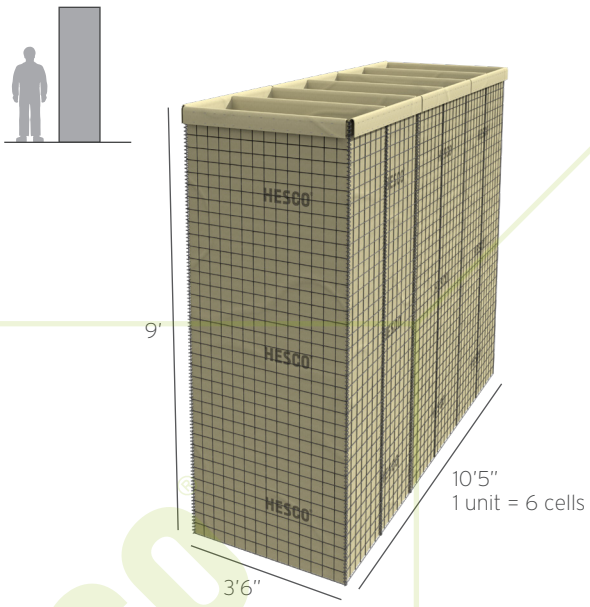

PACKAGING AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS

HEIGHT	WIDTH	LENGTH	WEIGHT
4" (0.10m)	7'3" (2.21m)	9' (2.74m)	437 lb (198kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
6 units	2'8" (0.80m)	7'3" (2.21m)	9'2" (2.80m)	2,690 lb (1,220kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	12	72	751' (229m)
20' Container	4	24	250'4" (76m)
40' Container	8	48	500'10" (152m)

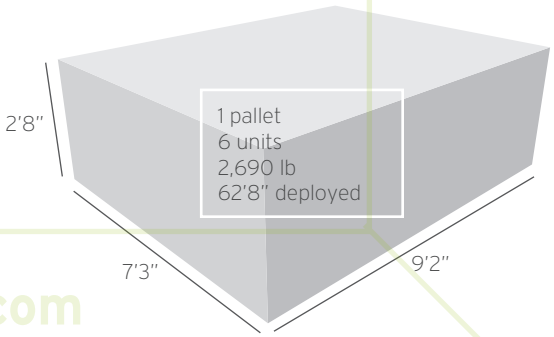

Hesco Group
4100 Park Approach
Thorpe Park, Leeds
LS15 8GB
United Kingdom

Telephone: +44 113 248 6633
Email: support@hesco.com

Disclaimer: The information contained in this document is intended solely to provide general guidance. The right is reserved to make changes to this document without notice at any time. Nothing in this document (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment.

Proud to be a PRÆSIDIAD brand, Hesco is part of a global network, working alongside Betafence and Guardiar as leaders in perimeter security systems and solutions. For more information please visit praesidiad.com.

Patents and Trademarks: HESCO® products are subject to patents and/or patent applications in territories around the world. HESCO® is a registered trademark of Hesco Bastion Ltd and its affiliates ("Hesco") around the world. Other trademarks also apply. For full details visit: hesco.com/legal_notice

Quality Standards: Hesco operates a quality management system certified to ISO9001. Approved Certificate number: 10147344

This material is subject to copyright protection. Copyright © 2022 Hesco. All rights reserved.